

**ALIMAK****SCANDO® 20/32 TD****...FOR PERSONNEL AND MATERIALS TRANSPORT****Technical Data****CAPACITY**

Pay-load capacity	2000 kg
Erection load	2000 kg
Speed	40 m/min
Maximum lifting height:	*150 meter
Erection crane capacity	175 kg

**CAGE & ENCLOSURE DIMENSIONS**

Internal width x length	1.5 x 3.2 m
Internal min. height floor/roof	2.55 m
Door opening w x h	1.48 x 2.0 m

**ELECTRICAL DATA**


Power supply	415 V / 50 Hz
Power supply fuses	80 Ampere
Rated power cont. duty	3 x 7.5 kW
Rated power 25% int. duty	3 x 9.5 kW
Starting current	270 Ampere
Power consumption	39 kVA

**WEIGHTS**

Base unit weight	2680 kg
Mast section with one rack	130 kg
Mast section with two racks	154 kg
Mast section dim.: c/c w x d	650 x 650 length 1508 mm

Base unit consisting of:  
Base frame, 2 pcs mast sections, enclosure and cage.

\*For mast combinations contact ALIMAK Australia

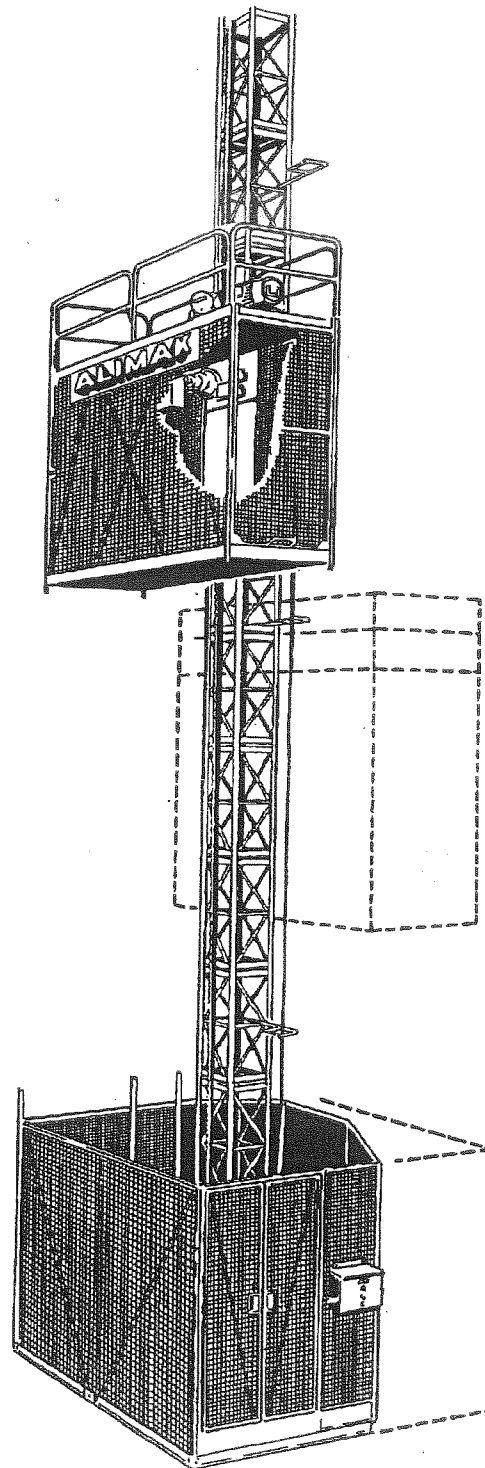


**ALIMAK AUSTRALIA PTY. LTD.** 96b Herald St. Cheltenham 3182, P.O. Box 506 Cheltenham 3192, Victoria Australia  
Phone +61-3-584 5322 - Telex AA 151 089 ALIMAK - Fax +61-3-584 4128

Pictures are illustrative only and do not necessary show the configuration of products on the market at the given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.

07 5456 4192

Q	REV	DESCRIPTION
2		
1		

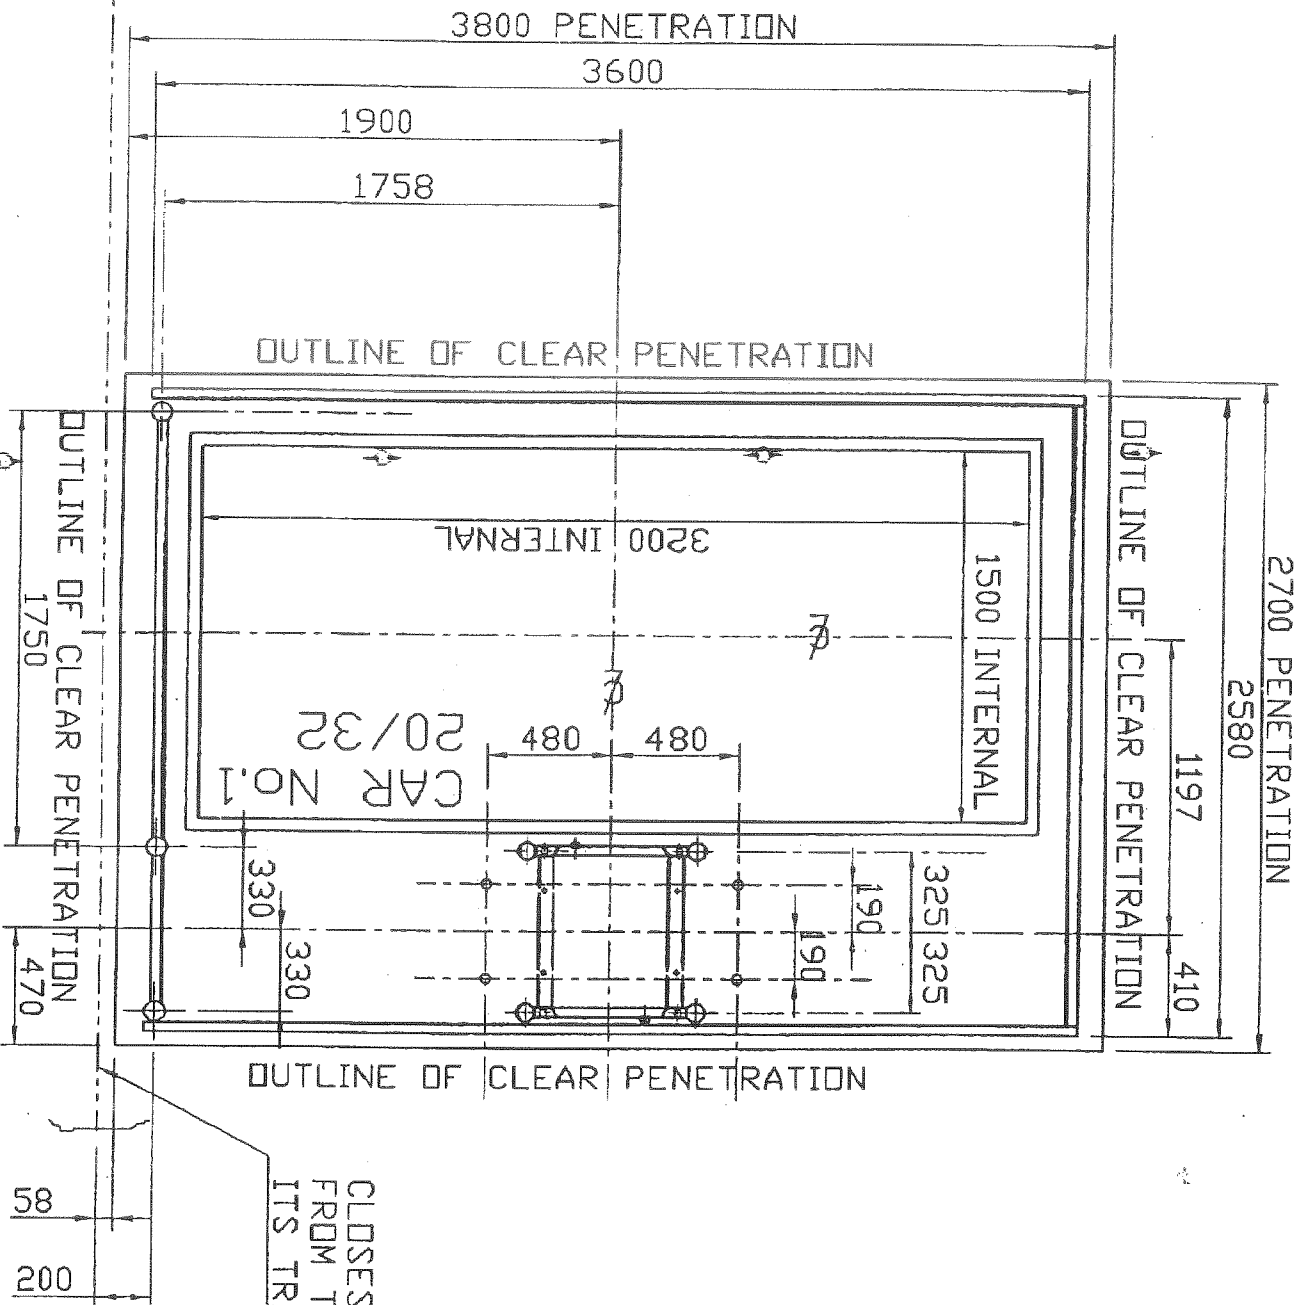

CLOSEST FACE OF THE BUILDING  
FROM THE HOIST ALONG  
ITS TRAVERSE.

PENETRATION WITH REF TO THE HOIST

ARMED/DA	DATE	TIME	ALERT
DESIGN	BT	DATE	
BROWN	1A	2-2-70	
CHOCOL			
SCALE			
70% RETROGRADE ONLY			
410			
SCANDIO 20/32 CONST. HOIST WITH PENETRATION			
ALKABAK AUSTRIA PVT. LTD. TROBACH & SONS LTD 7th & 8th FLOOR 9193			
	SECT. NO.		